

italiano

Tubo appiattibile per mandata acqua

Applicazione: tubo cord leggero ed appiattibile, utilizzato per mandata acque industriali o reflue, nelle pompe sommerse e negli impianti di irrigazione mobili.
Disponibile a 5 bar con copertura nera o rossa.

Temperatura: da -25°C a +70°C

COSTRUZIONE

Sottostrato: nero, liscio in gomma SBR.

Rinforzo: tessuti sintetici ad alta tenacità.

Copertura: nera, liscia (ad impressione tela) in gomma EPDM, resistente agli agenti atmosferici e all'ozono.

Marcatura: transfer ad elica di colore verde "IVG...Water.."

① Disponibile inoltre alla pressione di 10 o 20 bar nero in copertura.

english

Lightweight water discharge hose

Application: softwall lightweight hose, used for industrial and waste waters which is specially suitable for submersible pumps, movable surface irrigation systems, sewer cleaning, etc..

Available at working pressure of 5 bar with black or red cover

Temperature range: -25°C (-13°F) to +70°C (+158°F)

CONSTRUCTION


Tube: black, smooth, SBR rubber compound.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish) EPDM rubber compound, weathering and ozone resistant.

Branding: continuous spiral green brand "IVG...Water"...

① Also available at W.P. 10 or 20 bar with black cover.

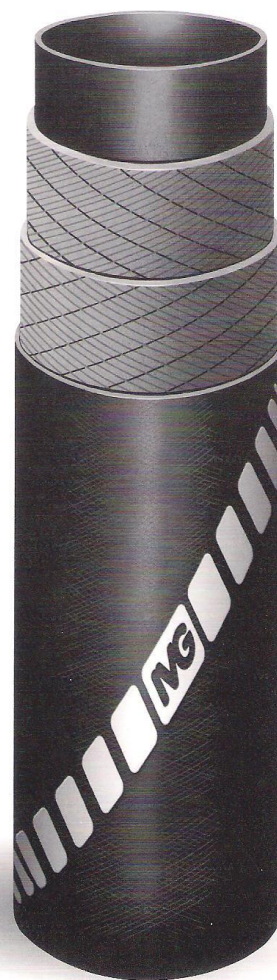



Water Oslo

CODICE		diametro interno		diametro esterno		pressione di esercizio		pressione di scoppio (teorica)		peso (nominale)	
CODE		inside diameter		outside diameter		working pressure		burst pressure (theoretical)		weight (nominal)	
		mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft
BLACK COVER 5 bar	1185012	25	1	35	1-3/8	5	75	15	225	0.63	0.42
	1084054	30	1-3/16	36	1-27/64	5	75	15	225	0.36	0.24
	1233009	32	1-1/4	39	1-17/32	5	75	15	225	0.47	0.32
	1032500	32	1-1/4	42	1-21/32	5	75	15	225	0.78	0.52
	1162187	35	1-3/8	40	1-37/64	5	75	15	225	0.37	0.25
	1070720	38	1-1/2	43.5	1-11/16	5	75	15	225	0.43	0.29
	1265229	38	1-1/2	46	1-13/16	5	75	15	225	0.64	0.43
	1032119	38	1-1/2	48	1-57/64	5	75	15	225	0.91	0.61
	1078895	48	1-57/64	60	2-3/8	5	75	15	225	1.37	0.92
	1168495	51	2	56.5	2-1/4	5	75	15	225	0.56	0.38
	1226185	51	2	59	2-21/64	5	75	15	225	0.81	0.54
	1227653	63.5	2-1/2	69	2-23/32	5	75	15	225	0.69	0.46
	1168509	76	3	81.5	3-3/16	5	75	15	225	0.82	0.55
	1216660	76	3	85	3-11/32	5	75	15	225	1.44	0.97
	1182200	76	3	87	3-27/64	5	75	15	225	1.84	1.24
	1028855	80	3-5/32	87	3-27/64	5	75	15	225	1.14	0.77
	1071181	100	3-15/16	106	4-11/64	5	75	15	225	1.20	0.81
	1071238	102	4	108	4-1/4	5	75	15	225	1.22	0.82
	1220888	102	4	111	4-3/8	5	75	15	225	1.69	1.14
	1214748	110	4-21/64	116	4-9/16	5	75	15	225	1.31	0.88
	1384457	120	4-23/32	129.5	5-5/64	5	75	15	225	1.88	1.26
	1033425	127	5	137	5-7/16	5	75	15	225	2.70	1.81
	1071530	152	6	158	6-7/32	5	75	15	225	1.82	1.22
	1210408	203	8	210	8-17/64	5	75	15	225	2.49	1.67
	1095420	203	8	211	8-5/16	5	75	15	225	2.98	2.00
	1207539	203	8	214	8-27/64	5	75	15	225	4.36	2.93
	1095412	254	10	262	10-5/16	5	75	15	225	3.68	2.47
	1312120	305	12	317	12-1/2	5	75	15	225	6.83	4.59
1320688	350	13-25/32	362	14-1/4	5	75	15	225	7.62	5.12	
RED COVER 5 bar	1032410	22	7/8	31	1-7/32	5	75	15	225	0.50	0.34
	1032100	32	1-1/4	42	1-21/32	5	75	15	225	0.79	0.53
	1033727	38	1-1/2	48	1-57/64	5	75	15	225	0.93	0.62
	1191462	51	2	57.5	2-1/4	5	75	15	225	0.69	0.46
	1155253	102	4	109	4-19/64	5	75	15	225	1.41	0.95
	1033867	114	4-31/64	130	5-1/8	5	75	15	225	4.24	2.85
	1195310	152	6	159	6-1/4	5	75	15	225	1.93	1.30
	1153676	203	8	211	8-5/16	5	75	15	225	3.08	2.07
	1300261	305	12	317	12-1/2	5	75	15	225	7.00	4.70

Water

1 0 • 2 0 0 3



Water Oslo

CODICE CODE	diametro interno inside diameter		diametro esterno outside diameter		pressione di esercizio working pressure		pressione di scoppio (teorica) burst pressure (theoretical)		peso (nominale) weight (nominal)	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft
① 10 bar										
1213083	32	1-1/4	38	1-1/2	10	150	30	450	0.41	0.27
1070746	38	1-1/2	44	1-47/64	10	150	30	450	0.48	0.32
1103318	38	1-1/2	45	1-49/64	10	150	30	450	0.53	0.36
1213490	38	1-1/2	46	1-13/16	10	150	30	450	0.63	0.42
1324950	38	1-1/2	46.5	1-27/32	10	150	30	450	0.69	0.46
1029096	40	1-37/64	46	1-13/16	10	150	30	450	0.50	0.34
1029134	45	1-49/64	51	2	10	150	30	450	0.56	0.38
1278363	48	1-57/64	55	2-11/64	10	150	30	450	0.66	0.44
1070843	51	2	57	2-1/4	10	150	30	450	0.63	0.42
1029177	51	2	58	2-9/32	10	150	30	450	0.72	0.48
1316699	51	2	59.5	2-3/8	10	150	30	450	0.90	0.60
1070932	60	2-3/8	66	2-19/32	10	150	30	450	0.74	0.50
1029223	60	2-3/8	67	2-41/64	10	150	30	450	0.79	0.53
1174568	63,5	2-1/2	70	2-3/4	10	150	30	450	0.78	0.52
1361490	63,5	2-1/2	72	2-27/32	10	150	30	450	1.11	0.75
1029240	70	2-3/4	77	3-1/32	10	150	30	450	0.92	0.62
1096974	76	3	82	3-15/64	10	150	30	450	0.92	0.62
1029274	76	3	83	3-17/64	10	150	30	450	0.99	0.67
1188038	76	3	84	3-5/16	10	150	30	450	1.21	0.81
1316680	76	3	84.5	3-11/32	10	150	30	450	1.31	0.88
1029304	80	3-5/32	87	3-27/64	10	150	30	450	1.03	0.69
1290860	80	3-5/32	91	3-19/32	10	150	30	450	1.78	1.20
1290851	90	3-35/64	101	3-31/32	10	150	30	450	1.99	1.34
1071203	100	3-15/16	107	4-7/32	10	150	30	450	1.28	0.86
1029339	100	3-15/16	108	4-1/4	10	150	30	450	1.49	1.00
1290843	100	3-15/16	111.5	4-27/64	10	150	30	450	2.20	1.48
1029371	102	4	109	4-19/64	10	150	30	450	1.30	0.87
1071262	102	4	110	4-21/64	10	150	30	450	1.52	1.02
1386832	152	6	159	6-1/4	10	150	30	450	2.05	1.38
1186000	152	6	160	6-19/64	10	150	30	450	2.29	1.54
1207423	152	6	163.5	6-29/64	10	150	30	450	3.34	2.24
1337327	152	6	164	6-29/64	10	150	30	450	3.38	2.27
1093754	203	8	213	8-25/64	10	150	30	450	3.66	2.46
1174223	203	8	215.5	8-15/32	10	150	30	450	4.64	3.12
1201131	203	8	217	8-35/64	10	150	30	450	5.24	3.52
1093746	254	10	265.5	10-15/32	10	150	30	450	5.16	3.47
1199099	254	10	268	10-9/16	10	150	30	450	6.42	4.31
1093762	305	12	318.5	12-17/32	10	150	30	450	6.92	4.65